

QubePAK® Regal 3

Architectural Outdoor LED Wall Pack



Key Features

- Modern LED replacement for traditional fluorescent or HID fixtures.
- Adjustable, full-cutoff design with a tilt mechanism that allows for precise aiming.
- Night sky friendly: eliminates light pollution and minimizes glare.

Electrical

- 120-277VAC 0-10V dimming standard.
- System power factor >90% and THD <20%.
- Operating temperature: -40°C to 40°C (-40°F to 104°F).

Mounting

- Housing is configured for mounting directly over a standard 4" outlet box (by others) or surface wiring via any of the convenient 1/2" threaded conduit entries.

Construction

- Robust die-cast aluminum housing protects integral components from harsh environments and optimizes thermal management.
- Housing is protected by a corrosion resistant bronze powder coat finish.
- Impact-resistant polycarbonate lens.

Optics

- Type II optical distribution standard. Consult factory for other available distributions. ¹
- Industry-leading LEDs with 5000K CCT (minimum 70 CRI).
- Lumen Maintenance: 167,000 hours (L70) ²

Warranty

- Backed by US LED's industry-leading Ten-Year Warranty.

Project	Date
---------	------

Catalog Number	Type
----------------	------

Product Performance Summary

Lumen Output	Up to 17,299 lumens
Efficacy	Up to 177 LPW
CRI	≥ 70 CRI
Available CCT	5000K
Warranty	Ten-Year Warranty

Product Overview

The Qube®PAK Regal 3 LED wall pack is designed to easily integrate into any existing architecture and provide superior illumination. With an adjustable design, the QubePAK Regal 3 provides a complete site-wide solution for commercial exterior applications. Its elegant aesthetics combined with first-class performance make it a popular choice with specifiers and lighting designers.

Product Applications

- Perimeter Areas
- Building Exteriors
- Security Lighting
- Wall Washing
- Parking Lots
- Educational Facilities
- Business Campuses
- Industrial Facilities
- Mall/Retail Exteriors
- General Lighting

Product Certifications

- UL Listed
- Complies with UL1598 and CSA C22.2
- DLC Listed
- Suitable for Wet Locations
- IP65 Rated Enclosure
- RoHS Compliant



Ordering Information

Example: **WPR3-UNVL-32-2-50-BZ**

WPR3					
Series	Input Voltage	Power	Optics	CCT	Finish
UNVL	120-277V	24 24W 32 32W 40 40W 60 60W 80 80W 100 100W	2 Type 2	50 5000K	BZ Bronze







Accessories	
BB	Remote Battery Back Up
PC	Photocell
C	Casambi Enabled ³

1. Additional IES distributions available (consult factory).
 2. US LED product 'Lifetimes' refer only to the LED light engine, not the power source, and are based on the Illuminating Engineering Society's TM21 Projected Lumen Maintenance methodology at a 25° C / 77° F ambient temperature. The lifetimes are solely meant to be a guide for expected LED degradation and not a warranty or predictive of their actual life, which can be affected by ambient temperatures and other factors.
 3. Casambi Enabled option only available in models 60W and above.

QubePAK Regal3

Architectural Outdoor LED Wall Pack

Dimensions

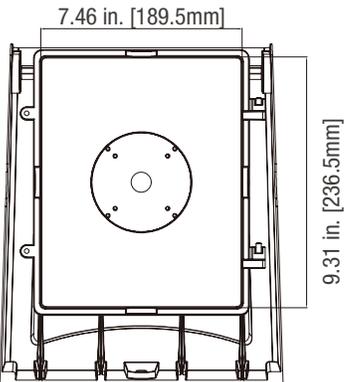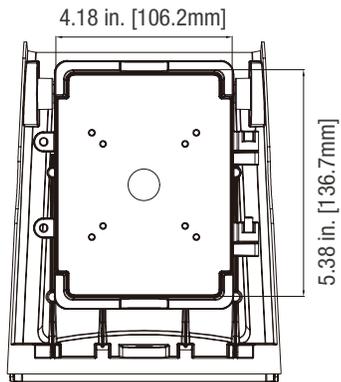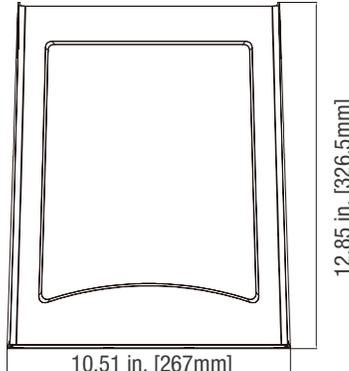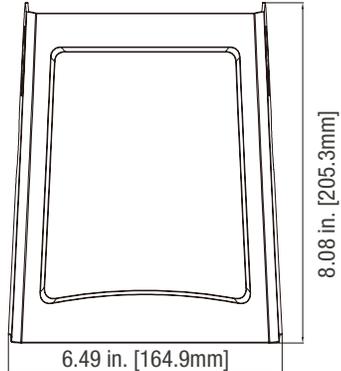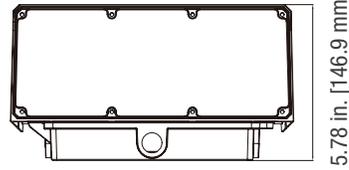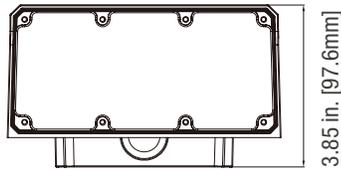

Model	Net Weight
24-40W	2.87 lbs. (1.3kg)

Model	Net Weight
60-100W	2.87 lbs. (1.3kg)

Performance Data

Model	CCT	System Level Power	Delivered Lumens	Efficacy	BUG Rating	L70 Calculated Life
WPR3-UNVL-24-X-50-BZ	5000K	23.2W	4,038.4	174.1 LPW	B2-U2-G1	167,000 Hours
WPR3-UNVL-32-X-50-BZ	5000K	31.2W	5,335.5	171.0 LPW	B2-U2-G1	167,000 Hours
WPR3-UNVL-40-X-50-BZ	5000K	39.2W	6,573.9	167.7 LPW	B2-U3-G1	167,000 Hours
WPR3-UNVL-60-X-50-BZ	5000K	61.2W	10,859.0	177.4 LPW	B2-U3-G1	167,000 Hours
WPR3-UNVL-80-X-50-BZ	5000K	80.3W	13,938.0	173.5 LPW	B3-U3-G2	167,000 Hours
WPR3-UNVL-100-X-50-BZ	5000K	101.6W	17,299.0	170.3 LPW	B3-U3-G2	167,000 Hours