


### WARNING



- The installation must only be performed by a licensed electrician.
- To prevent death, injury or damage to property, this product must be installed in accordance to National Electric Code (NFPA70 in the US or Canadian Electrical Code (CSA22.1) in Canada.
- Disconnect power before installing the product or servicing it.
- Wait until fixture has cooled down before installing or servicing the fixture.
- Make sure that the fixture is grounded.
- Modification to the WPR3 fixture voids its warranty and UL Listing.
- Caution - Risk of fire.
- Min. 75°C supply conductor.
- Suitable for wet locations.
- Suitable for operation in ambient not exceeding 50°C.

### INSTALLATION INSTRUCTIONS

1. Verify power is disabled.
2. Remove fixture from carton.
3. Loosen the two captive screws opposite the hinge side.
4. With hing to the left, open cover approximately 120 degrees and slide cover away, to remove cover from the hinge pins.
5. Feed wires from line power through applicable conduit holes and mount fixture base to wall according to local codes using appropriate mounting hardware. Junction box, conduit, conduit fittings and mounting hardware are not supplied. Use fittings suitable for wet location (Type 4 or 4x). Use UL Listed fittings.
6. Slide cover onto base by aligning hinges.
7. Mate LED module wire connections.
8. Reconnect ground wire.
9. Close cover, use caution not to pinch wires, and secure with two screws opposite the hinge.
10. Adjust angle as appropriate.
11. Energize fixture.

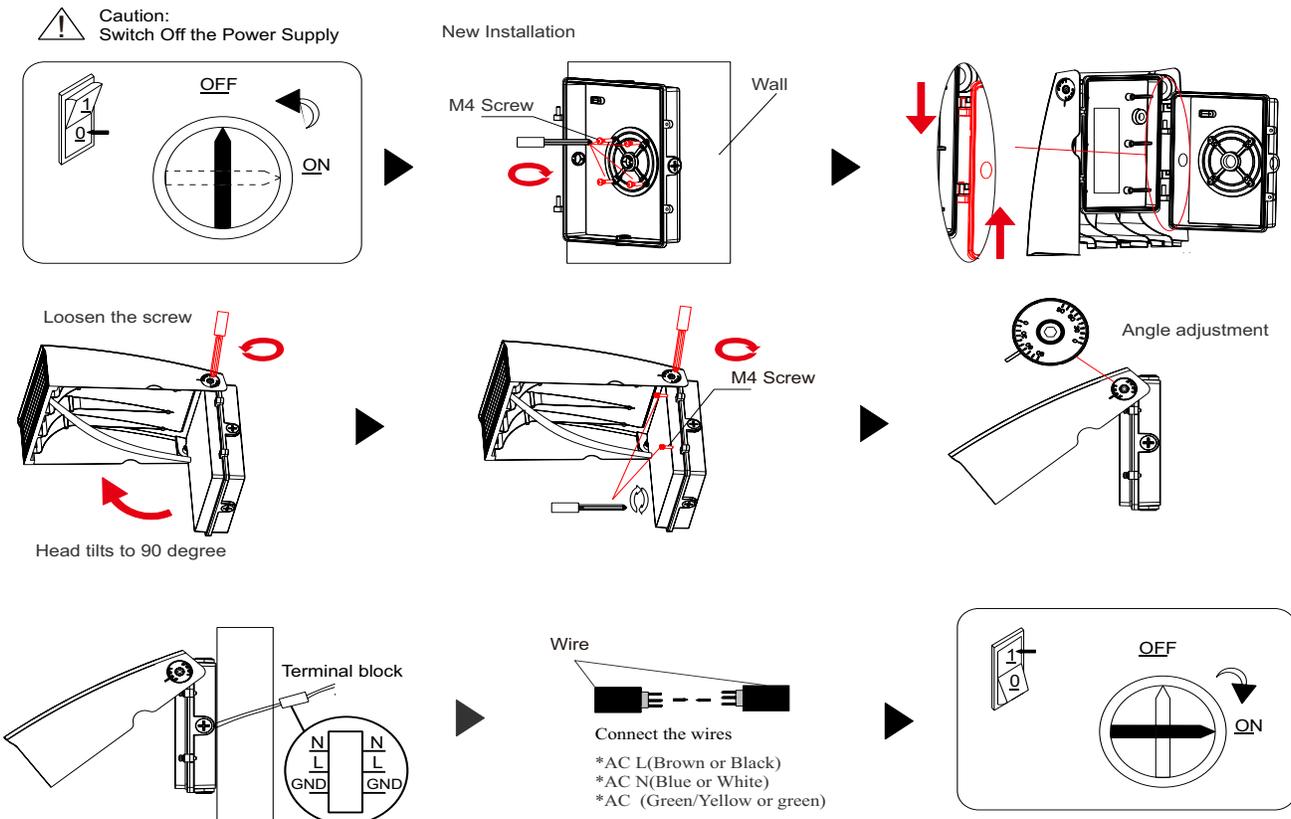

Specifications and dimensions subject to change without notice.